

Ø80>300
Simple Pared Serie 200
200 Series Single Wall

Serie 200 / 200 series



TI

Tubos Pipes

Ø	A	B
80	79	80
100	99	100
110	109	110
120	119	120
125	124	125
130	129	130
140	139	140
150	149	150
160	159	160
175	174	175
180	179	180
200	199	200
250	249	250
300	299	300

Unidades expresadas en mm
Units are in mm



Aplicaciones-Applications

Elemento tubo recto Simple Pared serie 200 de medidas útiles 938mm, 438mm, 188mm. No va incluida la brida unión. En acero inoxidable 304.


Straight tube element Wall Series 200 of useful measures 938mm, 438mm, 188mm. The union flange is not included. In stainless steel 304.

TEI

Tubo extensible 256 a 456
Extensible pipe 256 to 456

Ø	A	B
80	79	80
100	99	100
110	109	110
120	119	120
125	124	125
130	129	130
140	139	140
150	149	150
160	159	160
175	174	175
180	179	180
200	199	200
250	249	250
300	299	300

Unidades expresadas en mm
Units are in mm

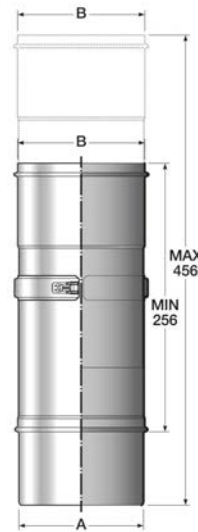

Aplicaciones-Applications

Se utiliza para ajustar diferentes longitudes útiles, el recorrido mínimo es de 256mm y el máximo 456mm. Este elemento no soporta el peso.


It is used to adjust different useful lengths, the minimum travel is 256mm and the maximum 456mm. This element does not support the weight.

CI45

Codo 45° Elbow 45°

Ø	A	B	C
80	79	80	72
100	99	100	75
110	109	110	79
120	119	120	77
125	124	125	78
130	129	130	79
140	139	140	80
150	149	150	82
160	159	160	83
175	174	175	85
180	179	180	86
200	199	200	89
250	249	250	96
300	299	300	104

Unidades expresadas en mm
Units are in mm

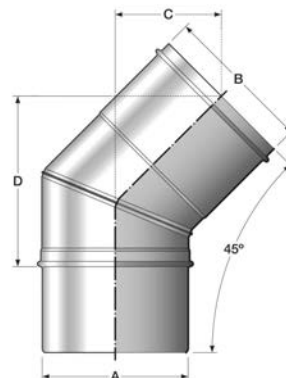

Aplicaciones-Applications

Elemento para desviaciones a 45°. Fuera del catálogo existe la posibilidad de desviaciones a: C18°, C115°, C130° y C160°.

Element for deviations at 45°. Outside the catalog there is the possibility of deviations to: C18°, C115°, C130° and C160°.