


○  $\varnothing 80 > 300$   
Simple Pared Estanca serie 310  
Deadlock 310 Series Single Wall

## CI45

Codo 45°  
Elbow 45°

Ø	A	B	C
80	80	96	59
100	100	103	62
120	120	110	65
130	130	114	67
140	140	117	68
150	150	121	70
160	160	124	71
180	180	131	74
200	200	138	77
250	250	156	84
300	300	174	92

Unidades expresadas en mm  
Units are in mm



### Aplicaciones-Applications

Elemento para desviaciones a 45°. Fuera del catálogo existe la posibilidad de desviaciones a: CIG15°, CIG30° y CIG60°.


Element for deviations at 45°. Outside the catalog there is the possibility of deviations to: CIG15°, CIG30° and CIG60°.

## CI90

Codo 90°  
Elbow 90°

Ø	A	B	C
80	80	84	136
100	100	96	146
120	120	106	156
130	130	111	161
140	140	116	166
150	150	121	171
160	160	126	176
180	180	136	186
200	200	146	196
250	250	171	221
300	300	196	246

Unidades expresadas en mm  
Units are in mm



### Aplicaciones-Applications

Elemento para desviaciones a 90°. Fuera del catálogo existe la posibilidad de desviaciones a: CIG15°, CIG30° y CIG60°.


Element for deviations at 90°. Outside the catalog there is the possibility of deviations to: CIG15°, CIG30° and CIG60°.

## TTIGF90

Te con entronque Hembra a 90°  
T-piece with female connection at 90°

Ø	A	B	C
80	80	84	136
100	100	96	146
120	120	106	156
130	130	111	161
140	140	116	166
150	150	121	171
160	160	126	176
180	180	136	186
200	200	146	196
250	250	171	221
300	300	196	246

Unidades expresadas en mm  
Units are in mm

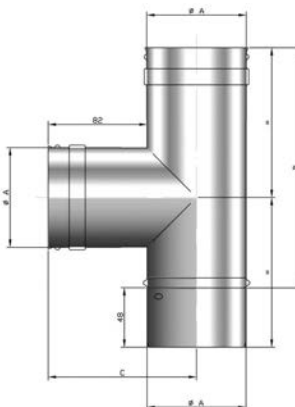

### Aplicaciones-Applications

Desviación de Serie 310 de simple pared a 90° y con el entronque hembra. Tapón no incluido.

Deviation te Series 310 of simple wall to 90° and with the female junction. Stopper not included.