

Ø80 > 300
Doble Pared Inox-Inox
Double Wall Inox-Inox

Lana de roca de 30mm de espesor
Rockwool thickness of 30 mm

Con pared interior en acero Inox AISI 316 L
Inner wall made of stainless steel AISI 316 L
Con pared interior en acero Inox AISI 304
Inner wall made of stainless steel AISI 304



SBDP

Soporte base
Base

Ø	A	B	C
80	140	280	580
100	160	300	580
125	185	325	580
150	210	350	580
175	235	375	580
200	260	400	580
250	310	450	580
300	360	500	580

Unidades expresadas en mm
Units are in mm



Aplicaciones-Applications

Se utiliza conjuntamente con la placa mosaico PMDP. Esta pieza va normalmente fuera del edificio, para soportar lateralmente de la chimenea.


It is used in conjunction with the PMDP mosaic plate. This piece normally goes outside the building, to support laterally the chimney.

TFDP

Placa cortafuegos
Fire barrier plate

Ø	A	B
80	320	150
100	340	170
125	365	195
150	390	220
175	415	245
200	440	270
250	490	320
300	540	370

Unidades expresadas en mm
Units are in mm

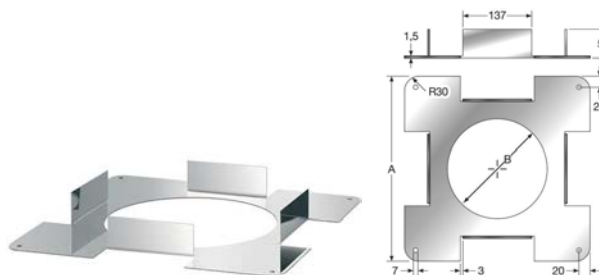

Aplicaciones-Applications

A consultar con Bofill

To consult with Bofill

BRIU

Brida unión
Union clamp

Ø	A
80	140
100	160
125	185
150	210
175	235
200	260
250	310
300	360

Unidades expresadas en mm
Units are in mm



Aplicaciones-Applications

Se utiliza para unir diferentes elementos y le da rigidez a la chimenea. Se incluye en toda la gama de doble pared: tubos, codos, tes.

It is used to join different elements and gives rigidity to the chimney. It is included in the entire range of double walls: tubes, elbows, tees.